


NOTES:





1. OPERATION TYPE MAY BE PUSH-UP, RIGHT HAND CHAIN HOIST, OR RIGHT HAND INTERNAL ELECTRIC.
2. FOR CRITICAL FITS DUE TO REDUCED AVAILABLE HEADROOM OR SIDEROOM CLEARANCES, CONSULT FACTORY.
3. CLEARANCES SHOWN ARE MAXIMUMS. LESSER CLEARANCES MAY BE POSSIBLE.
4. UNLESS OTHERWISE NOTED, DOORS SHALL BE PROVIDED WITH SLIDE LOCKS AT EACH END OF BOTTOM BAR, ENGAGING GUIDES IN THE LOCKED POSITION (OPTIONAL CURTAIN MOUNTED MINI LATCH)
5. ALL OPENING PREPARATION, ELECTRICAL POWER AND FIELD PAINTING SHALL BE PROVIDED BY OTHERS.
6. SERIES 1100I IS AN INSULATED SERIES 1100.
7. CURTAIN FINISH SHALL BE SILICONE POLYESTER PRE-PAINT OVER GALVANIZED GRADE 80 STEEL.
8. GUIDES, BRACKETS, BOTTOM BAR ANGLE AND HEAD STOPS ARE ZINC COATED.
9. MAXIMUM OPENING SIZE: 12'-0" X 14'-0".
10. PRODUCTS PRODUCED WITH A THIRD-PARTY EVALUATION TO ADHERE TO THE TEXAS DEPARTMENT OF INSURANCE STANDARDS WILL BE LISTED VIA. WWW.TDI.TEXAS.GOV
11. JANUS MODEL 750 IS A STATE OF FLORIDA APPROVED WINDLOAD PRODUCT. PRODUCT EVALUATIONS AND STAMPED DRAWINGS ARE ACCESSIBLE VIA. www.floridabuilding.org . FL#21450
12. RAIN LIP CLEARANCE DIMENSION OUTSIDE OF GUIDE = 4 5/8" MINIMUM.

HEADROOM REQUIRED


OPENING HEIGHT	VERTICAL HEADROOM	HORIZONTAL HEADROOM
THRU 8'-0"	18"	17 1/2"
OVER 8'-0" THRU 10'-0"	18 1/2"	17 3/4"
OVER 10'-0" THRU 12'-0"	18 3/4"	18"
OVER 12'-0" THRU 14'-0"	19"	18 1/2"

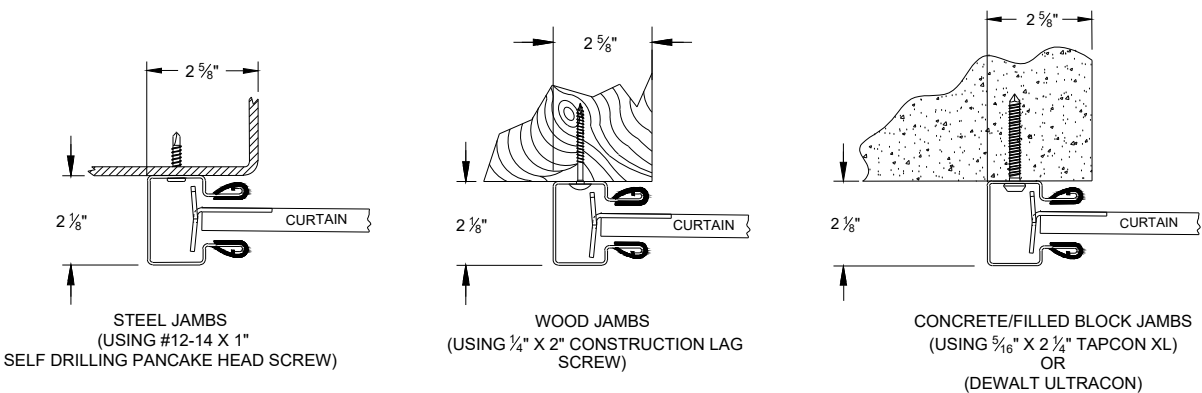

16 GA GUIDE MOUNTING DETAIL

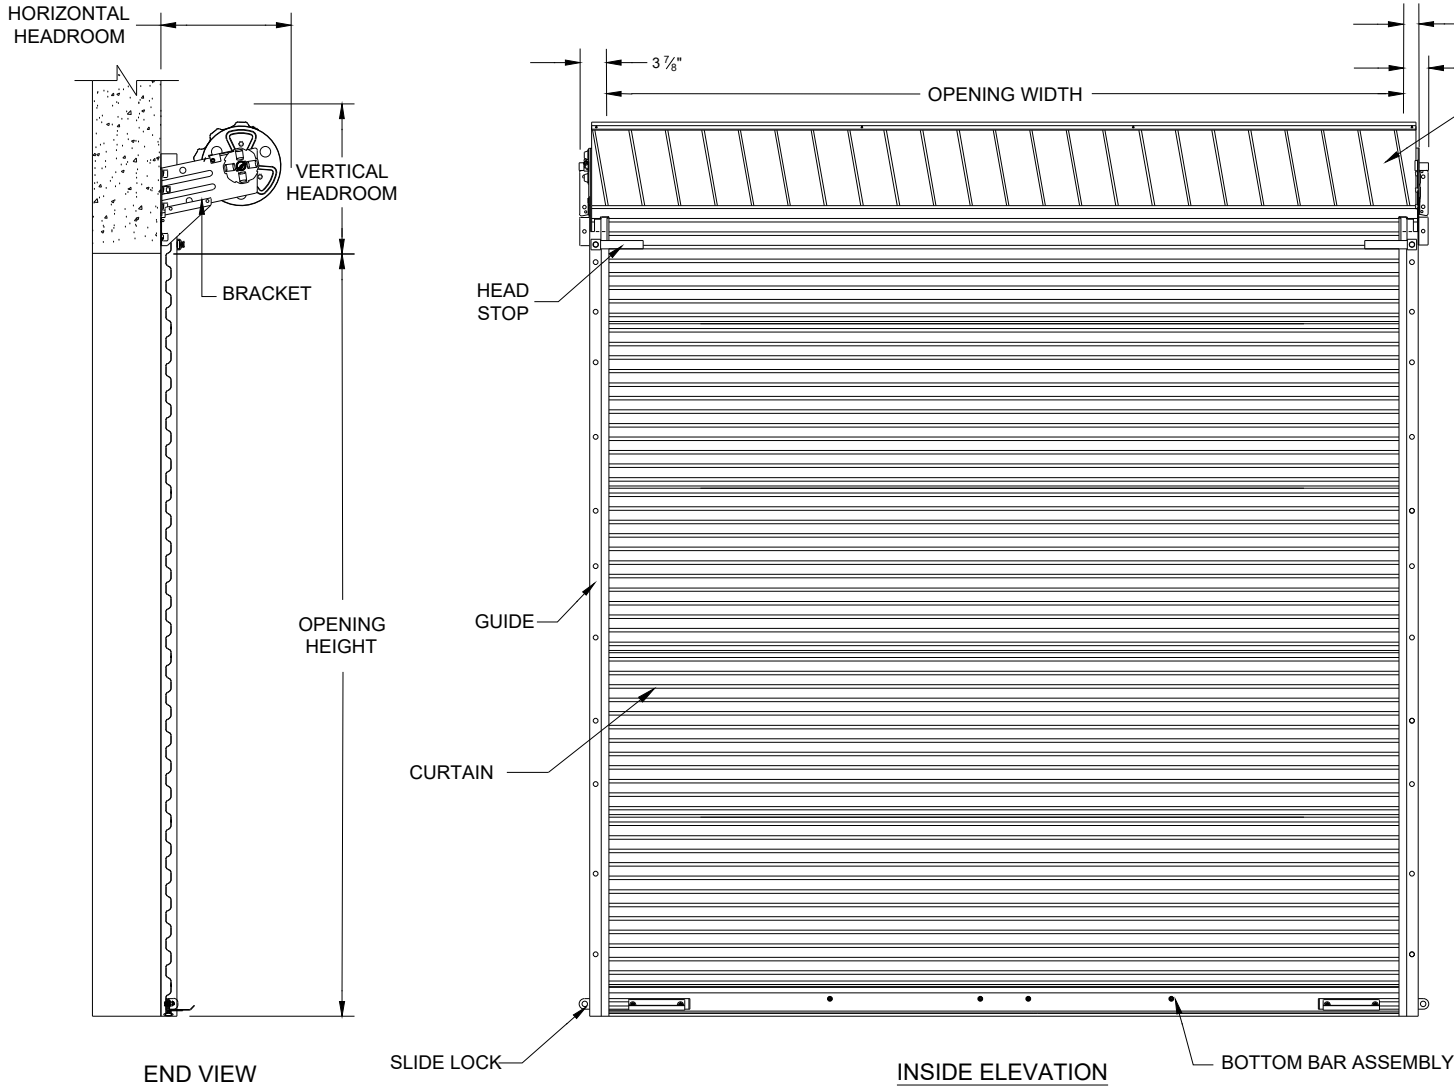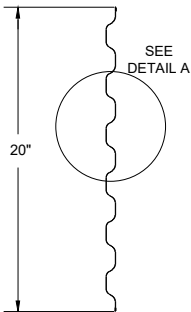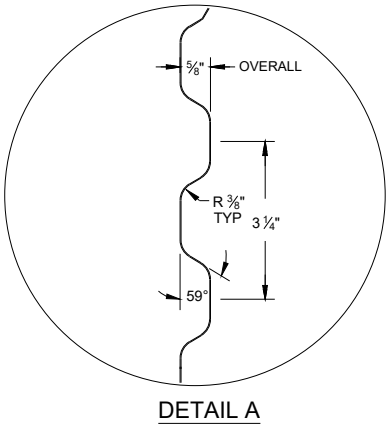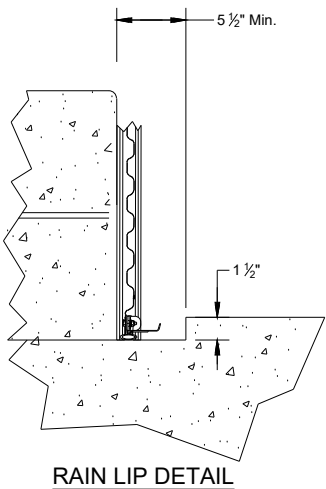

- (*) FOR PUSH-UP OPERATION.....4"
- FOR HAND CHAIN OPERATION.....4"
- FOR ELECTRIC OPERATION.....4"
- FOR OUTSIDE OF CHAIN DRIVE.....6"
- FOR ATA OPERATION.....6 3/4"
- NOTE: RIGHT SIDE DRIVE SHOWN

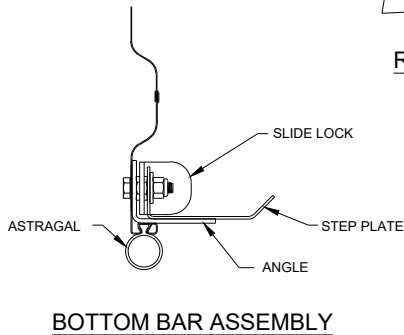

DRAWING #: 814005-0000

L.E. 09/06/2024

COMMERCIAL DOOR SERIES: 1100/1100I

CUSTOMER NUMBER:				DATE:			
CUSTOMER NAME:				CONTACT:			
PROJECT NAME:							
PROJECT LOCATION:							
PLANT:				SALESPERSON:			
DRAWN BY:				DATE:		Austin Building Systems Call 888-399-6079 buildmetal.com	
DRAWING NUMBER:				SHT:	OF:		