



1. OPERATION TYPE MAY BE PUSH-UP, HAND CHAIN OR ELECTRIC.
2. FOR CRITICAL FITS DUE TO REDUCED AVAILABLE HEADROOM OR SIDEROOM CLEARANCES, CONSULT FACTORY.
3. THE AXLE CAN BE "TRIMMED" TO ACCOMMODATE LOW SIDEROOM.
4. CLEARANCES SHOWN ARE MAXIMUMS. LESSER CLEARANCES MAY BE POSSIBLE.
5. UNLESS OTHERWISE NOTED, DOORS SHALL BE PROVIDED WITH SLIDE LOCKS AT EACH END OF BOTTOM BAR, ENGAGING GUIDES IN THE LOCKED POSITION.
6. ALL OPENING PREPARATION, ELECTRICAL POWER AND FIELD PAINTING SHALL BE PROVIDED BY OTHERS.
7. SERIES 3652I IS AN INSULATED SERIES 3652.
8. CURTAIN FINISH SHALL BE SILICONE POLYESTER PRE-PAINT OVER GALVANIZED GRADE 80 STEEL.
9. GUIDES, BRACKETS, BOTTOM BAR ANGLE AND HEAD STOPS ARE ZINC COATED.
10. MAXIMUM OPENING SIZE: 18'-0" X 14'-0"
11. JANUS MODEL 3652I IS A STATE OF FLORIDA APPROVED WINDLOAD PRODUCT. PRODUCT EVALUATIONS AND STAMPED DRAWINGS ARE ACCESSIBLE VIA. www.floridabuilding.org . FL#21450
12. JANUS PRODUCTS PRODUCED WITH A THIRD-PARTY EVALUATION TO ADHERE TO THE TEXAS DEPARTMENT OF INSURANCE STANDARDS WILL BE LISTED VIA. WWW.TDI.TEXAS.GOV
13. RAIN LIP CLEARANCE DIMENSION OUTSIDE OF GUIDE = 4 3/8" MINIMUM

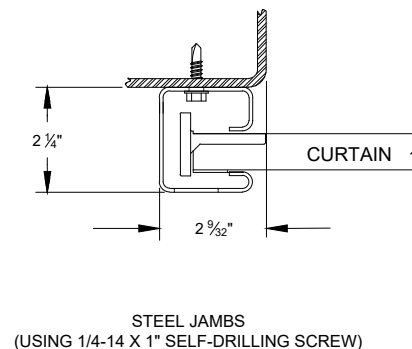

5 1/2" Min.

1 1/2"

RAIN LIP DETAIL

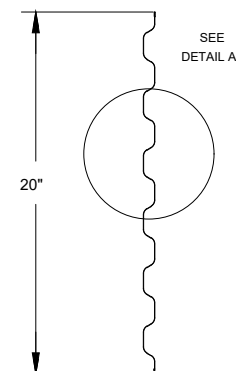

BOTTOM BAR ASSEMBLY

DRAWING #: 814011-0000

L.E. 09/24/2024

CUSTOMER NUMBER:		DATE:	
CUSTOMER NAME:		CONTACT:	
PROJECT NAME:			
PROJECT LOCATION:			
PLANT:		SALESPERSON:	
DRAWN BY:		DATE:	
DRAWING NUMBER:		SHT:	OF:
Austin Building Systems Call 888-399-6079 buildmetal.com			

