




# COMMERCIAL DOOR SERIES 2000


*Light Duty Commercial Grade Door*

*Opening sized thru 12' x 18'*


## INTERIOR ELEVATION

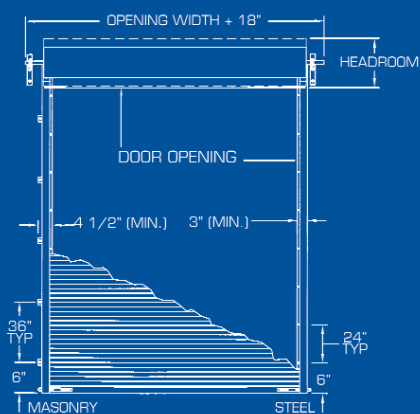


## GUIDE MOUNTING

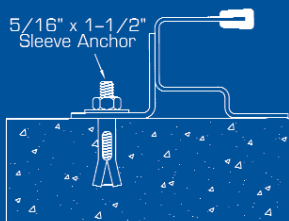

Masonry Mount

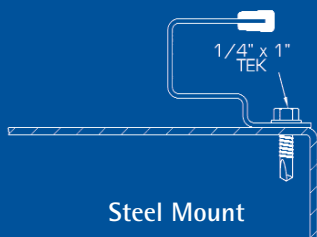

Steel Mount

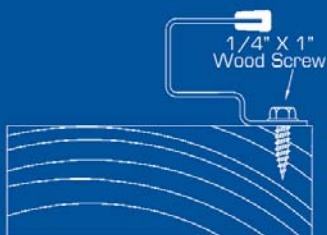

Wood Mount

## General Description

- Designed for frequent usage requirements
- Light duty applications for frequent usage including warehouse, freight terminal and industrial warehouse
- Utilizes 12" drums
- Limited maximum size of 12' x 18'


## Curtain

- 26-gauge galvanized
- Grade E hard steel
- Deep ribbed corrugation
- 20 standard colors – special colors upon request with upcharge
- Siliconized polyester WeatherX paint over prime coat
- Wash coat over primer interior side
- 25-year film integrity warranty – up to 20-year chalk and fade
- Improved flexible wear strips
- 4" of curtain add



## Bottom Bar

- 6063-T6 aluminum extrusion
- 2" x 1 1/2" galvanized angles
- Bulb astrigal
- Stainless steel nuts and bolts



## Axle/Torque Tube

- 1 5/16" O.D. steel axle, 14-gauge
- Oil tempered torsion springs
- 16-gauge drums 12" diameter galvanized
- Steel ball bearings
- Full top sheet 26-gauge galvanized



The Power of INNOVATION.

The Strength of PARTNERSHIP.



## Guides

- 14-gauge galvanized
- Polyethylene wear strip
- Bolt on head stop 1/4" plate steel
- Pre punched for lock and attachment screws




## Hardware

- 13-gauge saddle clamps
- 10-gauge slide locks 2 per door
- 16-gauge step plate 2 per door
- 1/4" steel welded angle T-bracket



## Options

- Insulation Series 2250
- Chain hoist 4:1 reduction
- Vision panels (17" x 5")
- Top draft stop
- Hood
- Steel mounting plates
- Electric operator



## DBCi Commercial Steel Curtain Roll-Up Door Solutions Include:

### 2000 (2250 Insulated)

- 14-gauge door guides
- 16-gauge galvanized steel drums w/steel ball bearings
- 26-gauge grade E steel curtain

### 2500 (2750 Insulated)

- Heavy duty 12-gauge, three-inch deep guides
- 10-gauge steel slide bolt lock
- Width up to 18 feet

### 3000 (3250 Insulated)

- Four-inch deep guides with windlock insert
- Aluminum steel angle bottom bar


### 4000 Series

- 24-gauge curtain


### 5100 Series

- Wind certified up to 16' wide


## GUIDE DETAIL

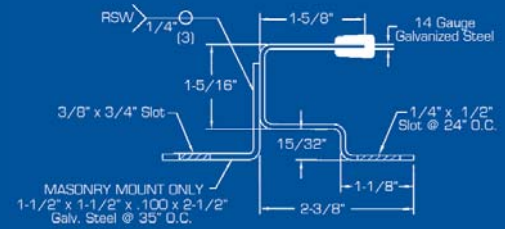

## DOOR ENGAGEMENT

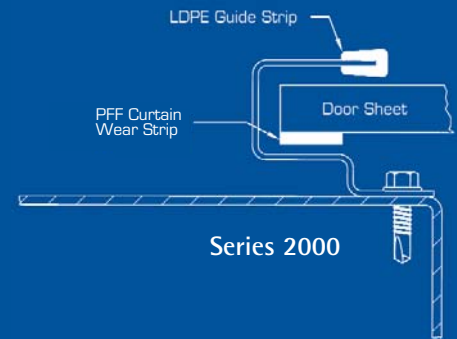

## INSULATED DOOR DETAIL

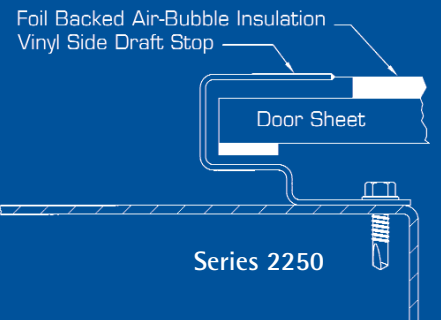

## OPENING HEIGHT HEADROOM

Thru 14' 0"	21"
Over 14' 0"	23"

\*CONTACT A DBCi SALES REPRESENTATIVE FOR A DETAILED DRAWING.